

ಕಾಲೇಜು ಅಭಿವೃದ್ಧಿ ಸಮಿತಿ
ಸರ್ಕಾರಿ ಪ್ರಥಮ ದರ್ಜೆ ಕಾಲೇಜು,
ನರಸಿಂಹರಾಜಪುರ-577134 ಚಿಕ್ಕಮಗಳೂರು ಜಿಲ್ಲೆ,

ಅಧ್ಯಕ್ಷರು

ಶ್ರೀ ಟಿ ಡಿ ರಾಜೇಗೌಡು

ಶಾಸಕರು, ಶೃಂಗೇರಿ ವಿಧಾನಸಭಾ ಕ್ಷೇತ್ರ

ಕಾರ್ಯಾಧ್ಯಕ್ಷರು

ಶ್ರೀ ಪ್ರಶಾಂತ್ ಎಲ್ ಶೆಟ್ಟಿ

ಪಟ್ಟಣ ಪಂಚಾಯಿತಿ ಸ್ಥಾಯಿ ಸಮಿತಿ ಅಧ್ಯಕ್ಷರು

ಸದಸ್ಯ ಕಾರ್ಯದರ್ಶಿಗಳು

ಡಾ. ಧನಂಜಯ

ಪ್ರಾಂಶುಪಾಲರು

ಸಂಖ್ಯೆ: ಸಪ್ರದಕಾ/ನರಾಪುರ/ ಸಿಡಿ/ 2 /2024-25

ದಿನಾಂಕ: 04.09.2024

ಇಂದ

ಪ್ರಶಾಂತ್ ಎಲ್ ಶೆಟ್ಟಿ,

ಕಾರ್ಯಾಧ್ಯಕ್ಷರು,

ಸರ್ಕಾರಿ ಪ್ರಥಮ ದರ್ಜೆ ಕಾಲೇಜು

ನರಸಿಂಹರಾಜಪುರ.

ಇವರಿಗೆ,

ಎಂ. ಶ್ರೀನಿವಾಸರವರು,

ಮಾನ್ಯ ಅಧ್ಯಕ್ಷರು

ಕರ್ನಾಟಕ ರಾಜ್ಯ ಪ್ರವಾಸೋದ್ಯಮ ಅಭಿವೃದ್ಧಿ ನಿಗಮ,

ಬೆಂಗಳೂರು.

ಮಾನ್ಯರೆ,

ವಿಷಯ: ಸರ್ಕಾರಿ ಪ್ರಥಮ ದರ್ಜೆ ಕಾಲೇಜು, ನರಸಿಂಹರಾಜಪುರ. ಇಲ್ಲಿ ವಿದ್ಯಾರ್ಥಿಗಳಿಗೆ ಕೊರತೆ ಇರುವ ತರಗತಿ ನಡೆಸುವ ಕೊಠಡಿಗಳು ಕಾಂಪೌಂಡ್, ಬಾಕ್ಸ್ ಚರಂಡಿ ಕಾಮಗಾರಿ ಮತ್ತು ಒಂದು ಶೌಚಾಲಯದ ಕಾಮಗಾರಿ ಕೈಗೊಳ್ಳಲು ಸಿ.ಎಸ್.ಆರ್ ನಿಧಿಯ ಅಡಿಯಲ್ಲಿ ಅನುದಾನ ಮಂಜೂರು ಮಾಡುವ ಬಗ್ಗೆ.

ಮೇಲ್ಕಂಡ ವಿಷಯಕ್ಕೆ ಸಂಬಂಧಿಸಿದಂತೆ ಸರ್ಕಾರಿ ಪ್ರಥಮ ದರ್ಜೆ ಕಾಲೇಜು, ನರಸಿಂಹರಾಜಪುರ ಇಲ್ಲಿ ವಿದ್ಯಾರ್ಥಿಗಳಿಗೆ ಪ್ರಸ್ತುತ ಎರಡು ತರಗತಿ ನಡೆಸುವ ಕೊಠಡಿಗಳು, ಕಾಂಪೌಂಡ್, ಬಾಕ್ಸ್ ಚರಂಡಿ ಕಾಮಗಾರಿ ಮತ್ತು ಒಂದು ಶೌಚಾಲಯದ ಅಗತ್ಯವಿದೆ. ಆದ ಕಾರಣ ತಮ್ಮ ಪ್ರವಾಸೋದ್ಯಮ ಅಭಿವೃದ್ಧಿ ನಿಗಮದ ಸಿ.ಎಸ್.ಆರ್ ನಿಧಿಯ ಅಡಿಯಲ್ಲಿ ಎರಡು ತರಗತಿ ನಡೆಸುವ ಕೊಠಡಿಗಳು, ಕಾಂಪೌಂಡ್, ಬಾಕ್ಸ್ ಚರಂಡಿ ಕಾಮಗಾರಿ ಮತ್ತು ಒಂದು ಶೌಚಾಲಯದ ಕಾಮಗಾರಿ ಕೈಗೊಳ್ಳಲು ಅನುದಾನ ಮಂಜೂರು ಮಾಡುವಂತೆ ಈ ಮೂಲಕ ಕೋರಲಾಗಿದೆ.

ವಂದನೆಗಳೊಂದಿಗೆ.


ತಮ್ಮ ವಿಶ್ವಾಸಿ

ಚಿಕ್ಕಮಗಳೂರು ನಿರ್ಮಿತಿ ಕೇಂದ್ರ, ಚಿಕ್ಕಮಗಳೂರು

ಕಲ್ಲುದೊಡ್ಡಿ, ಹಿರೇಕೊಳಲೆ ರಸ್ತೆ, ಚಿಕ್ಕಮಗಳೂರು

ದೂರವಾಣಿ ಸಂಖ್ಯೆ : 08262-237726

E-mail : chikkamagalurnk@gmail.com

ಸಂ:ನಿ.ಕೇ:ಅಂದಾಜುಪಟ್ಟಿ:ಸಿಆರ್:590 :2024-25

ದಿನಾಂಕ : 24.03.2025

ರವರಿಗೆ,


ವ್ಯವಸ್ಥಾಪಕ ನಿರ್ದೇಶಕರು,
ಕರ್ನಾಟಕ ರಾಜ್ಯ ಪ್ರವಾಸೋದ್ಯಮ
ಅಭಿವೃದ್ಧಿ ನಿಗಮ ನಿಯಮಿತ,
ಬೆಂಗಳೂರು

ಮಾನ್ಯರೇ,

ವಿಷಯ : ಸಾಂಸ್ಥಿಕ ಸಾಮಾಜಿಕ ಹೊಣೆಗಾರಿಗೆ ವಂತಿಗೆ (ಸಿ.ಎಸ್.ಆರ್ ಅನುದಾನ) ಯನ್ನು ಬಿಡುಗಡೆಗೊಳಿಸಲು
ಕಾಮಗಾರಿ ವೆಚ್ಚದ ಅಂದಾಜು ಪಟ್ಟಿಯನ್ನು ಸಲ್ಲಿಸುವ ಕುರಿತು.

ಮೇಲ್ಕಂಡ ವಿಷಯಕ್ಕೆ ಸಂಬಂಧಿಸಿದಂತೆ ಚಿಕ್ಕಮಗಳೂರು ಜಿಲ್ಲೆ ನರಸಿಂಹರಾಜಪುರ ಪಟ್ಟಣದಲ್ಲಿರುವ ಸರ್ಕಾರಿ ಕಾಲೇಜಿನ
ವಿವಿಧ ಕಾಮಗಾರಿಗಳನ್ನು ಕೈಗೊಳ್ಳಲು ಸಿ.ಎಸ್.ಆರ್ ನಿಧಿಯಡಿಯಲ್ಲಿ ಮಂಜೂರಾದ ಅನುದಾನದಲ್ಲಿ ಈ ಕಾಮಗಾರಿಗಳನ್ನು
ಅನುಷ್ಠಾನಗೊಳಿಸಲು ಚಿಕ್ಕಮಗಳೂರು ನಿರ್ಮಿತಿ ಕೇಂದ್ರದ ವತಿಯಿಂದ ವಿಸ್ತೃತವಾದ ಅಂದಾಜು ಪಟ್ಟಿಯನ್ನು ತಯಾರಿಸಿ
ಸಲ್ಲಿಸಲಾಗುವುದು ಹಾಗೂ ಈ ಕಾಮಗಾರಿಯನ್ನು ಚಿಕ್ಕಮಗಳೂರು ನಿರ್ಮಿತಿ ಕೇಂದ್ರದ ವತಿಯಿಂದ ನಿರ್ವಹಿಸಲಾಗುವುದು ಎಂಬ
ಲಂಶವನ್ನು ಈ ಮೂಲಕ ತಮ್ಮ ಅವಗಾಹನೆಗಾಗಿ ಸಲ್ಲಿಸಿದೆ.

ತಮ್ಮ ವಿಶ್ವಾಸಿ


ಯೋಜನಾ ವ್ಯವಸ್ಥಾಪಕರು
ಚಿಕ್ಕಮಗಳೂರು ನಿರ್ಮಿತಿ ಕೇಂದ್ರ
ಚಿಕ್ಕಮಗಳೂರು

ಕಾಮಗಾರಿಯ ಹೆಸರು :- ಚಿಕ್ಕಮಗಳೂರು ಜಿಲ್ಲೆ ನರಸಿಂಹರಾಜಪುರ ತಾಲ್ಲೂಕು ನರಸಿಂಹರಾಜಪುರ ಪಟ್ಟಣದಲ್ಲಿರುವ ಸರ್ಕಾರಿ ಪ್ರಥಮ ದರ್ಜೆ ಕಾಲೇಜು ಆವರಣದಲ್ಲಿ ಬಾಕ್ಸ್ ಚರಂಡಿ ನಿರ್ಮಾಣ ಹಾಗೂ ಇಂಟರ್ ಲಾಕ್ ಅಳವಡಿಸುವ ಕಾಮಗಾರಿ

ವರದಿ

ಚಿಕ್ಕಮಗಳೂರು ಜಿಲ್ಲೆ ನರಸಿಂಹರಾಜಪುರ ತಾಲ್ಲೂಕು ನರಸಿಂಹರಾಜಪುರ ಪಟ್ಟಣದಲ್ಲಿರುವ ಸರ್ಕಾರಿ ಪ್ರಥಮ ದರ್ಜೆ ಕಾಲೇಜು ಆವರಣದಲ್ಲಿ ಬಾಕ್ಸ್ ಚರಂಡಿ ನಿರ್ಮಾಣ ಹಾಗೂ ಇಂಟರ್ ಲಾಕ್ ಅಳವಡಿಸುವ ಕಾಮಗಾರಿಯನ್ನು ಅನುಷ್ಠಾನಗೊಳಿಸಲು ಅಂದಾಜು ಪಟ್ಟಿಯನ್ನು ತಯಾರಿಸಿ ಸಲ್ಲಿಸುವಂತೆ ವ್ಯವಸ್ಥಾಪಕ ನಿರ್ದೇಶಕರು, ಕರ್ನಾಟಕ ರಾಜ್ಯ ಪ್ರವಾಸೋದ್ಯಮ ಅಭಿವೃದ್ಧಿ ನಿಗಮ ನಿಯಮಿತ, ಬೆಂಗಳೂರು ರವರು ತಿಳಿಸಿದ್ದು ಅದರಂತೆ ಸದರಿ ಕಾಮಗಾರಿಯ ಅಂದಾಜು ಪಟ್ಟಿಯನ್ನು ತಯಾರಿಸಿ ಸಲ್ಲಿಸಲಾಗುತ್ತಿದೆ.

ಅಂದಾಜು ಪಟ್ಟಿಯಲ್ಲಿ ಅಗತ್ಯವಿರುವ ಈ ಕೆಳಕಂಡ ಅಂಶಗಳನ್ನು ಅಳವಡಿಸಿಕೊಂಡು ಜಾರಿಯಲ್ಲಿರುವ 2024-25 ನೇ ಸಾಲಿನ ಲೋಕೋಪಯೋಗಿ ಇಲಾಖೆಯ ತಾಂತ್ರಿಕ ಇಲಾಖೆಗಳ ಏಕರೂಪ ದರಪಟ್ಟಿಯನ್ವಯ ರೂ 27.94574 ಲಕ್ಷಗಳಿಗೆ ತಯಾರಿಸಿ ಸಲ್ಲಿಸಲಾಗುತ್ತಿದೆ.

- Earth work excavation by manual means
- Providing and laying in position Cement Concrete For Drain
- Providing and laying in position Cement Concrete for Bottom & Drain Walls
- Supplying, fitting and placing TMT FE 550 / 550D Steel Reinforcement
- Providing, laying, spreading and compacting graded stone aggregate to wet mix macadam
- Providing and laying 80mm thick factory made precast M -30 grade Cement Concrete Paver Block
- Supplying and fixing M15 grade precast cement concrete Kerb stones
- Finishing walls with Acrylic Smooth exterior paint

Nithin H.
JUNIOR ENGINEER
Nirmithi Kendra
Chikmagalur

Project Manager
Chikmagalur Nirmithi Kendra
Chikmagalur

Managing Director
Karnataka State Tourism Development
Corporation Ltd., Bangalore - 560 022.

ಕಾಮಗಾರಿಯ ಹೆಸರು :- ಚಿಕ್ಕಮಗಳೂರು ಜಿಲ್ಲೆ ನರಸಿಂಹರಾಜಪುರ ತಾಲ್ಲೂಕು ನರಸಿಂಹರಾಜಪುರ ಪಟ್ಟಣದಲ್ಲಿರುವ ಸರ್ಕಾರಿ ಪ್ರಥಮ ದರ್ಜೆ ಕಾಲೇಜು ಆವರಣದಲ್ಲಿ ಬಾಕ್ಸ್ ಚರಂಡಿ ನಿರ್ಮಾಣ ಹಾಗೂ ಇಂಟರ್ ಲಾಕ್ ಅಳವಡಿಸುವ ಕಾಮಗಾರಿ

- 1 **Earth work excavation by manual means** for drains, canals, waste weir draft, approach channels, key trench, foundation of Bridges and such similar works, as per drawing and technical specifications, including setting out, shoring, strutting, barricading, caution lights, excavated surface leveled and sides neatly dressed disposing off or leveling the excavated stuff or sorting & stacking the selected stuff for reuse in a radius of 50 m and lift upto 1.5 m including cost of labour, tools, usage & other appurtenances required to complete the work. (Vol-1 SR, p, no 6/ I. no.1.5.1) **In ordinary/soft rock without blasting upto 1.5 m depth**

Basic Rate	299.00				
Add AW 12%	35.88				
	<u>334.88</u>	/cum			
Drain	2	215.00	0.90	0.85	328.95 cum
			@		334.88 /cum
					110159.00

- 2 **Providing and laying in position Cement Concrete for levelling course for all works in foundation.** The granite/trap/basalt crushed graded coarse aggregates and fine aggregates as per relevant IS Codes machine mixed, laid in layers not exceeding 150 mm thickness, well compacted using plate vibrators, including all lead & lifts, cost of all materials of quality, labour, Usage charges of machinery, curing, and all the other appurtenances required to complete the work as per technical specifications. **Mix 1:3:6 Using 40 mm nominal size graded crushed coarse aggregates** (Vol- 1, P.NO-15, I.NO-2.1.3)

Basic Rate	5989.00				
Add AW 12%	718.68				
	<u>6707.68</u>	/cum			
Drain	2	215.00	0.90	0.10	38.70 cum
			@		6707.68 /cum
					259587.00

- 3 **Providing and laying in position Cement Concrete for all Sub structures of building, Irrigation works, Sub structure works of bridges, Drain works & other parallel works from 0.50m to 3.50 m height.** The granite/trap/basalt crushed graded coarse aggregates and fine aggregates as per relevant IS Codes machine mixed with super plasticisers, laid in layers, well compacted using needle vibrators, providing weep holes wherever necessary, including all lead & lifts, cost of all materials of quality, confirming to the requirements of relevant IS codes, labour, Usage charges of machinery, curing and all other appurtenances required to complete the work as per technical specifications. **M20 Design Mix Using 20 mm nominal size graded crushed coarse aggregates** (p, no.16 / I. no.2.4.2)

Basic Rate	6323.00				
Centering Rate 8%	505.84				
	<u>6828.84</u>	/cum			
Add AW 12%	819.46				
	<u>7648.30</u>	/cum			
Bottom	2	215.00	0.90	0.10	38.70 cum
			@		7648.30 /cum
					295989.00

- 4 **Providing and laying in position Cement Concrete for all Sub structures of building, Irrigation works, Sub structure works of bridges, Drain works & other parallel works from 0.50m to 3.50 m height.** The granite/trap/basalt crushed graded coarse aggregates and fine aggregates as per relevant IS Codes machine mixed with super plasticisers, laid in layers, well compacted using needle vibrators, providing weep holes wherever necessary, including all lead & lifts, cost of all materials of quality, confirming to the requirements of relevant IS codes, labour, Usage charges of machinery, curing and all other appurtenances required to complete the work as per technical specifications. **M20 Design Mix Using 20 mm nominal size graded crushed coarse aggregates** (p, no.16 / I. no.2.4.2)

Basic Rate	6323.00				
Centering Rate 35%	2213.05				
	<u>8536.05</u>	/cum			
Add AW 12%	1024.33				
	<u>9560.38</u>	/cum			
For Drain Walls	2	215.00	0.15	0.60	38.70 cum
			@		9560.38 /cum
					369987.00

- 5 Supplying, fitting and placing TMT FE 550 / 550D Steel Reinforcement including cost of all materials, machinery, labour, cleaning, straightening, cutting, bending, hooking, laping/welding joints, tying with binding wire / soft annealed steel wire and other ancillary operations complete as per drawing and technical specification (p.no.84/ I. no.11.32) Buildings

Basic Rate	89457.00
Add AW 12%	10734.84
	<u>100191.84 /Tn</u>

For Wall

Main Bar 10MM	2	717	2.10	3011.40
Distribution Bar 8MM	2	7	215.00	3010.00

ABSTRACT

10MM	3011.40	X	0.62	1867.07
8MM	3010.00	X	0.40	1204.00
				<u>3071.07 Kgs</u>

Say 3.07 Tn
@ 89457.00 /Tn 274633.00

- 6 Providing, laying, spreading and compacting graded stone aggregate to wet mix macadam specification including premixing the Material with water at OMC in mechanical mix plant carriage of mixed Material by tipper to site, laying in uniform layers with paver/grader in sub-base / base course on well prepared surface and compacting with vibratory roller to achieve the desired density. (Vol-3 SR, p.no 26/ I. no.4.17)

Basic Rate	2559.00				
Add AW 12%	<u>307.08</u>				
	<u>2866.08</u> /cum				
	1	215.00	2.95	0.10	<u>63.43</u> cum
			@		<u>2866.08</u> /cum

181795.00

- 7 Providing and laying 80mm thick factory made precast M -30 grade Cement Concrete Paver Block as per IRC SP 63:2018 & IS 15658 for Commercial Traffic Axle load repetitions upto 10MSA & for Residential Streets of approved shape and colour, laid in required pattern and including over 40mm thick compacted bed of coarse sand, filling the joints with fine sand etc. all complete as per the direction of Engineer-in-charge. WMM/WBM Base to be paid separately as per relevant technical specification) (Vol-3 SR, p.no.51/ I. no.6.8.2)

Basic Rate	1161.00																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
------------	---------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

824728.00

- 8 Supplying and fixing M15 grade precast cement concrete Kerb stones for Roadway, Sidewalls and gutters fixed with CM 1:3 fixed and finished in line as per direction of Engineer in charge. (The cost of PCC shall be paid extra) (Vol-3 SR, p.no.74/ I. no.8.42.7) 300 x 300 x 150 mm Kerb Stone

Basic Rate	376.00
Add AW 12%	45.12
	<u>421.12 /Mtr</u>

1 215.00 215.00 Mtr
@ 421.12 /Mtr 90541.00

- 9 Finishing walls with Acrylic Smooth exterior paint of required shade :New work (Two coat applied @ 1.67L/10 m² over and including priming coat of exterior primer applied @ 2.20 kg/10 m²) with paint of approved quality to give an even shade, after thoroughly brooming the surface to remove all dirt, dust, mortar drops and foreign matter including preparing the surface even and sand paper smooth, cost of materials, labour complete as per specifications and as per directions of Engineer-in-charge. (p.no.46/ I. no.8.30)

Basic Rate	174.00
Add AW 12%	20.88
	<u>194.88 /Sqm</u>

2 215.00 0.20 86.00 Sqm
@ 194.88 /Sqm 16760.00
Sub Total Rs = 2424179.00

*10 Less 3% on P.W.D Rates

Sub Total Rs = 72725.00
2351454.00

11 Add G.S.T 18% @ total cost of building 423262.00

12 Add Third Party Inspection Charge 0.18% @ total cost of building 5030.00

13 Add Technical Scrutiny Charges 0.50% @ total cost of building 13972.00

14 Miscellaneous and rounding off. 856.00

TOTAL ESTIMATED AMOUNT Rs = 2794574.00

"IN WORDS"

{ Rs Twenty Seven Lakhs Ninty Four Thousand Five Hundred Seventy Four Only }


(This Estimation is prepared Using Common S.R.2024 - 2025)

Nithin H.C.
JUNIOR ENGINEER
Nirmithi Kendra
Chikmagalur

[Signature]
Managing Director
Karnataka State Tourism Development
Corporation Ltd., Bangalore - 560 022.

[Signature]
Project Manager
Chikmagalur Nirmithi Kendra
Chikmagalur

N.R PURA (TQ) BOX DRAIN @ DEGREE COLLEGE

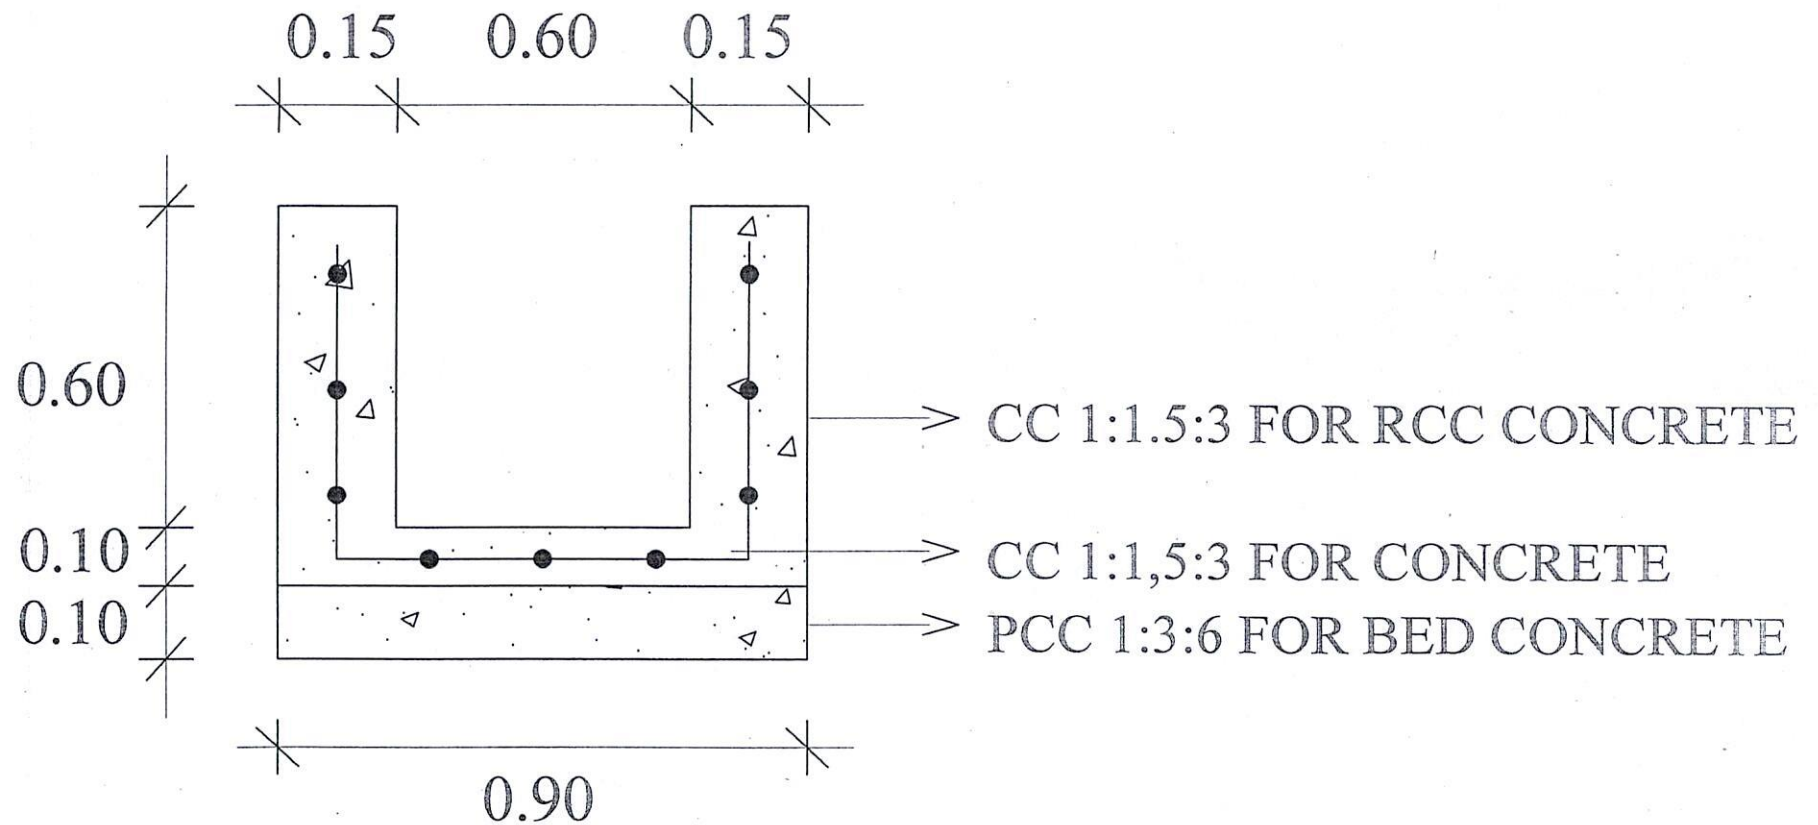

C / SECTION OF DRAINAGE

Nithin H.
JUNIOR ENGINEER
Nirmithi Kendra
Chikmagalur

P. J.
Managing Director
Karnataka State Tourism Development
Corporation Ltd., Bangalore - 560 022
Pradeep
Project Manager
Chikmagalur Nirmithi Kendra
Chikmagalur